



PLAN VIEW

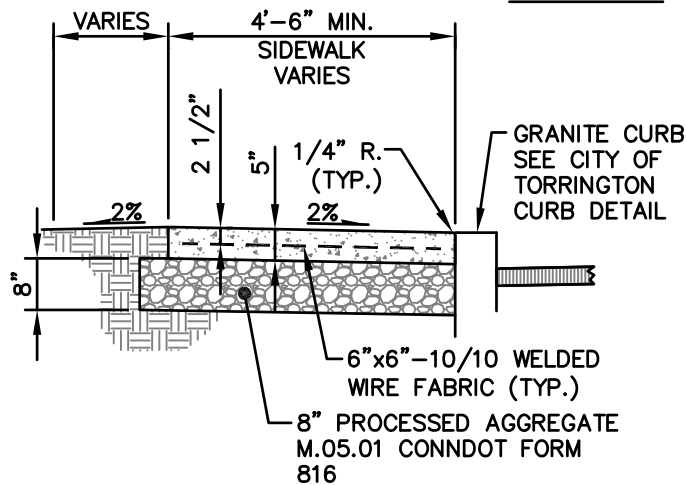

SIDEWALK SECTION

ADJACENT TO CURB

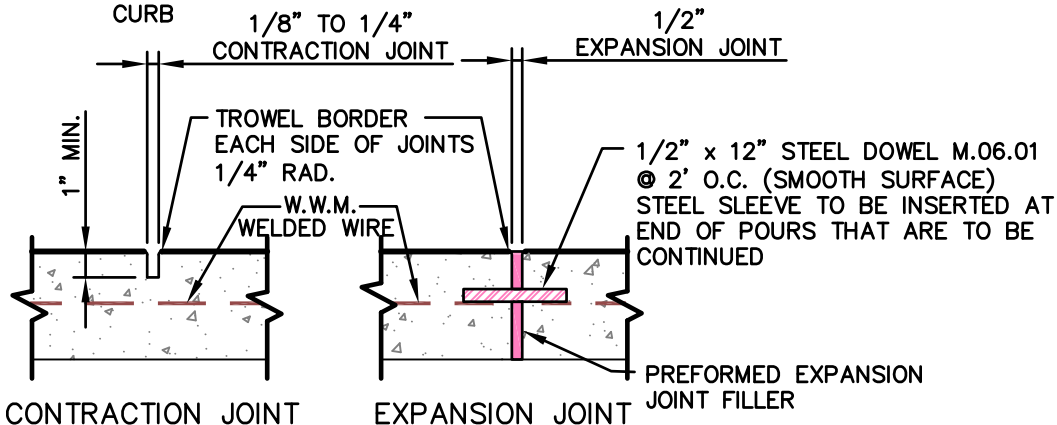

NOTES:

1. CLASS F 4000 PSI (28 DAYS) CONCRETE M.03.01 WITH 5% TO 7% ENTRAINED AIR CONNDOT STD. SPEC 9.21
2. WALKS NOT TO EXCEED 5% MAX. SLOPE AND 2% CROSS SLOPE UNLESS OTHERWISE NOTED AS RAMP.
3. EXPANSION JOINTS AASHTO M213 TO BE INSTALLED EVERY 20 FEET MAX.
4. ALL CONCRETE WALKS ARE TO BE SEALED WITH "SALTGAURD"—A PRESCO CONCRETE SEALER OR APPROVED EQUAL AS DETAILED IN THE SPECIFICATIONS.

SCALE

N.T.S.

APPROVED

RV. DATE

AUG. 2008

JAN. 2010

AUG. 2011

CITY OF TORRINGTON
Engineering Department

CONCRETE SIDEWALK