


## NO SCALE

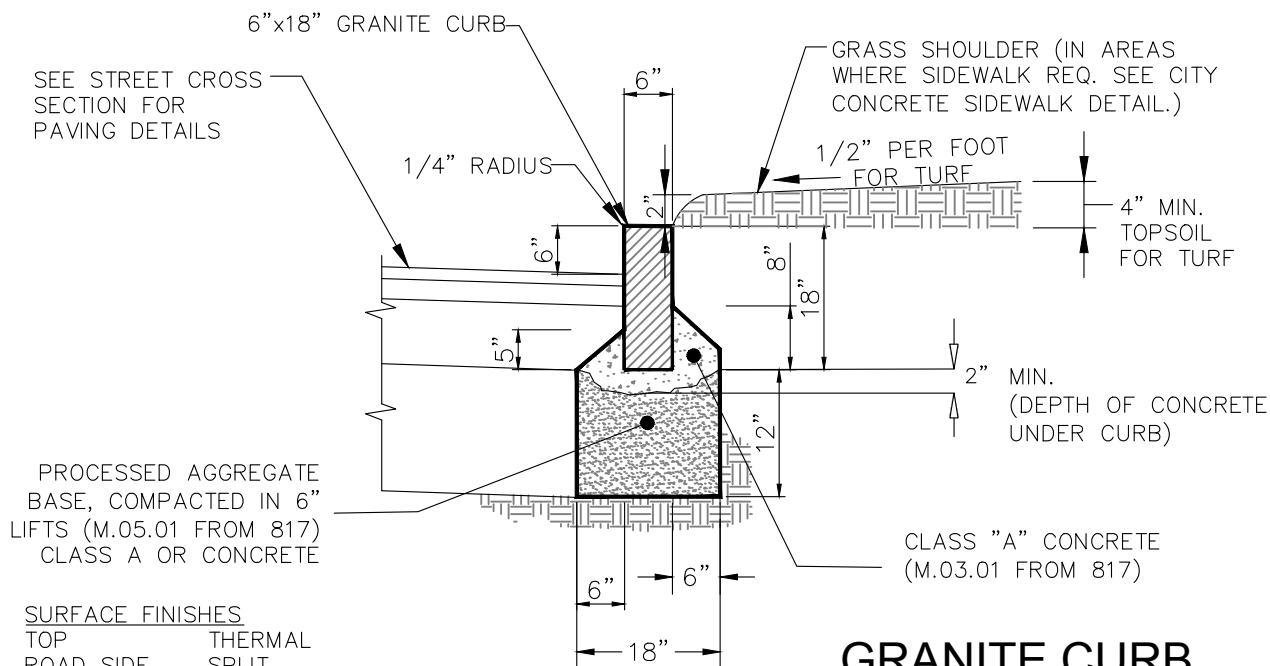

## NO SCALE

1. CURB JOINTS TO BE FILLED WITH SIKAFLEX -2c NS EZ MIX (COLOR LIMESTONE)
2. CONCRETE UNDER CURB SHALL BE INSTALLED UNDER EACH JOINT, EXTENDING MINIMUM 2' LONG AT EACH JOINT CENTERED ON THE JOINT.
3. CONCRETE UNDER GRANITE CURB SHALL BE INSTALLED FULL LENGTH OF THE CURB AT ALL DRIVEWAYS, SIDEWALK RAMPS AND WHERE NOTED ON THE DESIGN DRAWINGS.

SECTION 3.3 R1