


-
- SECTION A-A
- 6'-0" MAX
- GRANITE CURB INLET
AS PER "STANDARD
CATCH BASIN DETAILS"
SHEET.
- SOLID MANSORY
UNITS (BLOCK/BRICK)
- 1 1/4" DIA. LIFTING
HOLE TYP. PLUG
WITH TYPE II MORTAR
- KNOCKOUT FOR PIPE
MIN. 4" FROM TOP AND
BOTTOM OF RISER
- 2" MIN. SUMP
- FLOW LINE
- 3/4" CRUSHED
STONE BEDDING
- 1'-0" (TYP.)
- 1'-0" (TYP.)
- 8"
- 5'-4"
- 4'-0"
- 8"
- 6" MIN.
- 8"
- 6"
- 1'-6"
- CORREL UNIT
- 1'-7" MIN
- 5"
- 1'-7" MIN
- 8" MAX
- RISER
(VARIES)
- 1' MIN.
- RISER
(VARIES)

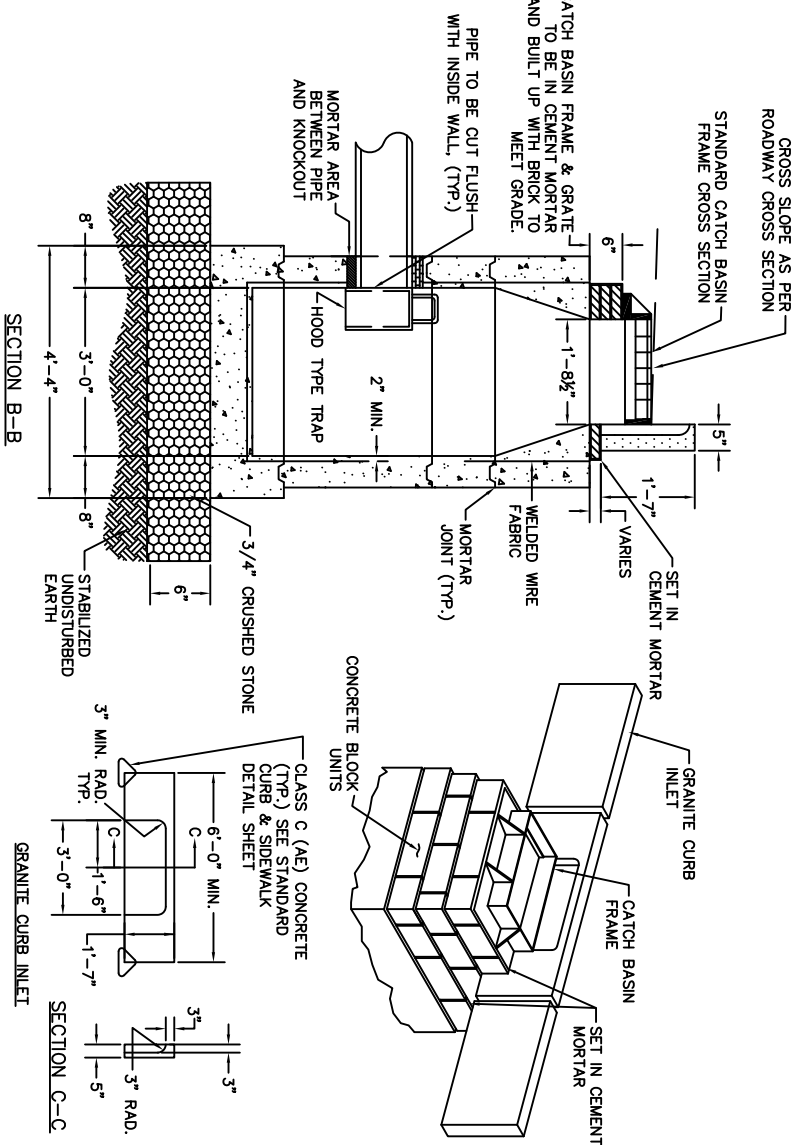

SECTION 4.15

SCALE	CITY OF TORRINGTON Engineering Department
N.T.S.	
APPROVED	
RV. DATE	
AUG. 2010	
AUG. 2011	GRANITE CURB TOP