

City of Torrington

ENGINEERING DEPARTMENT
(860) 489-2234



140 Main Street • City Hall
Torrington, CT 06790-5245
Fax: (860) 489-2550

ADDENDUM No. 5

DATE ISSUED: February 14, 2020

RE: "RECONSTRUCTION OF VARIOUS ROADS PHASE 2020.1"

BID # RVR-027-021320

All bidders are hereby advised of the following amendments to the Contract Bid Documents, which are hereby made an integral part of the specifications for the subject project, prepared by The City of Torrington, to the same extent as all other documents. All work shall conform to the standards and provisions of same.

Bids submitted shall be deemed to include the Contract Document information as shown in **Addendum No. 5**. General bidders shall notify sub-bidders that may be affected by this addendum as applicable. Bidders shall be required to acknowledge receipt of this Addendum in the space provided on the Bid Proposal Form, Page BP-1. Failure to acknowledge this Addendum by the Bidder may result in the rejection of their bid. Bidders are directed to review changes to all portions of the work as changes to one portion may affect the work of another.

- 1. Add the following paragraph to technical specification Section 2.02 Earth Excavation, paragraph 2.02.03 – Construction Methods, Part 9. Excavation behind existing curbing or beyond the edge of pavement:**

"Sod, grass and topsoil shall be stripped and removed to a depth of 4". Topsoil may be stripped and salvaged for reuse or removed. Existing underlying earth material shall be removed to expose all underlying asphalt. Removed earth material shall be salvaged, stockpiled and reused as backfill behind new curbing. Reclaimed material from the roadway may also be used as backfill behind new curbing when directed by the Engineer."

- 2. Add the following paragraph to technical specification Section 2.02 Earth Excavation, paragraph 2.02.04 – Method of Measurement:**

"New curbing shall be backfilled with existing materials from the project or approved imported borrow material supplied & installed by the contractor. Installation of backfill with site or imported material will be measured as cubic yards in place less volume of topsoil based on specified thickness of 4" (four inches).


Topsoil shall be measured for payment by square yards (S.Y.) under the item for Turf Establishment"

- 2. Add Typical Detail 3.15 "Bituminous Concrete Curb" dated February 14, 2020 (attached) to Drawing Sheet SD-3.**

END OF ADDENDUM No. 5

NOTE:

1. TACK COAT IS REQUIRED IF CURB IS NOT INSTALLED WITHIN 48 HOURS AFTER PLACEMENT OF BINDER COURSE

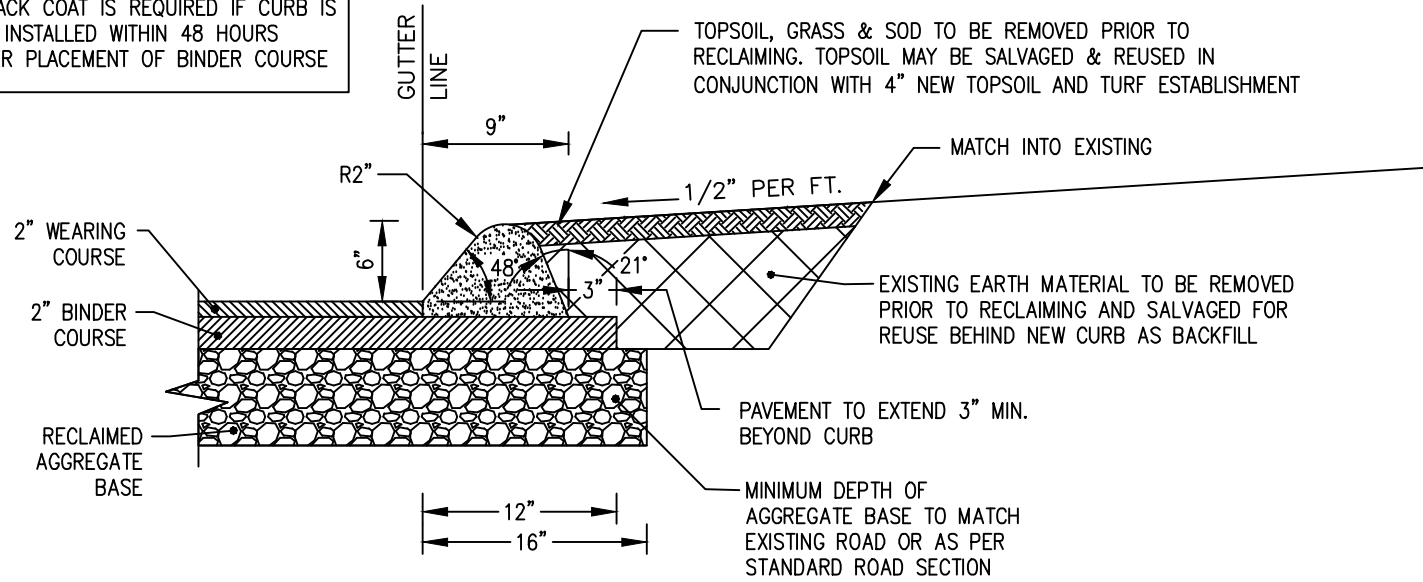

3.15

BITUMINOUS CONCRETE CURB

SEE STANDARD COT DETAIL 3.1

ADDENDUM #5 FEB 14, 2020