


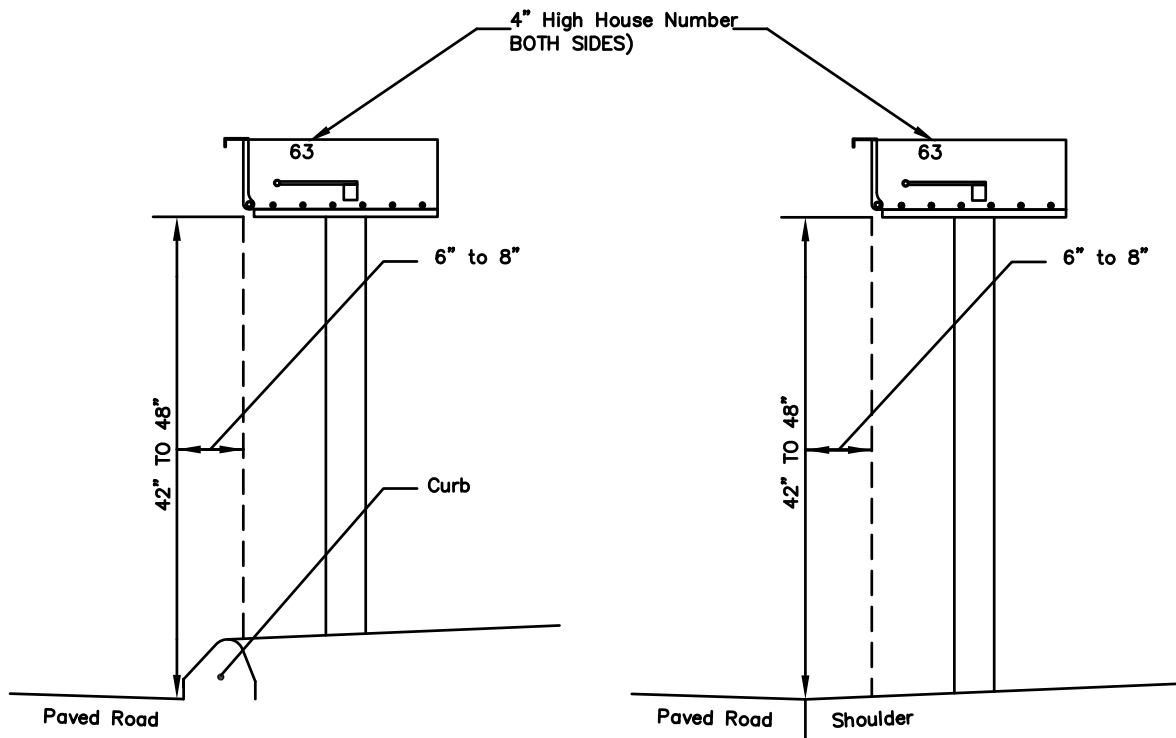

NOTE:

1. MAILBOXES NEED TO BE SECURE, PLUMB, NUMBERED AND AT THE HEIGHT OF 42 TO 48 INCHES FROM ROAD SURFACE TO INSIDE FLOOR OF THE MAILBOX OR POINT OF MAIL ENTRY ON LOCKED DESIGNS
2. FRONT OF THE BOX SHOULD BE POSITIONED 6 TO 8 INCHES FROM FACE OF CURB OR ROAD EDGE TO MAILBOX DOOR
3. APPROACH AND EXIT FROM BOX NEEDS CLEARANCE TO ALLOW DRIVE-THROUGH DELIVERY (NO BACKING UP SHOULD BE REQUIRED).
4. SCRATCH HAZARDS SUCH AS BRANCHES, BRUSH, OR ROCKS NEED TO BE REMOVED.
5. TRASH CANS SHOULD BE PLACED CLEAR OF DELIVERY AREA.
6. IN CASES WHERE THE HOUSE NUMBER IS POSTED ON BUILDING AND IS NOT VISIBLE FROM THE STREET BECAUSE OF BRUSH, TREES, ETC, AND THE HOUSE DOES NOT HAVE A ROADSIDE MAILBOX, AN ALTERNATE HOUSE NUMBER SIGN SIMILAR IN HEIGHT AND FONT SIZE SHALL BE ERRECTED ADJACENT TO THE DRIVEWAY ENTRANCE

MAILBOX INSTALLATION

SCALE - NONE

SCALE	CITY OF TORRINGTON
N.T.S.	
APPROVED	Engineering Department
RV. DATE	MAIL BOX
FEB. 2002	
AUG. 2007	
AUG. 2011	
	INSTALLATION