

CITY LOGO  
TO PRECEDE  
STREET NAME;  
LOGO NOT  
TO EXCEED  
6" TALL

RAIN CAP 1 3/4"

(FOR USE ON "PRIVATE DRIVES") Sign Color White with  
Black Letters

**Street Name** Private  
Drive

1/4" DIA. FASTENER  
WITH SPACER & NYLON  
WASHER (SIGN TO SIGN)

SIGN ASSEMBLY SIZE 9" ALUM

SIGN FONT HIGHWAY GOTHIC, MATERIAL VIP  
WHITE 3M

SIGN COLOR GREEN EC FILM -  
REFLECTIVITY TO COMPLY WITH MUTCD  
STANDARD (Section 2A.08, Table 2A-3  
Minimum Maintained Retroreflectivity Levels  
for Beaded Sheeting or Prismatic Sheeting)

DRILLED  
POS

STREET NAMES A COMBINATION OF UPPER  
AND LOWER CASE LETTERS; THE FIRST  
LETTER OF THE STREET NAME SHOULD BE  
UPPERCASE, WITH THE PROCEEDING LETTERS  
ALL BEING LOWERCASE; SUCH AS "Main St";  
STREET NAME LETTERS TO BE 6" TALL;  
STREET TYPE (St, Dr, etc...) LETTERS TO  
BE 3" TALL

3/8" DIA. DRIVE RIVET WITH 2  
NYLON WASHERS (SIGN TO POST)  
GREEN

POST ASSEMBLY  
TYPE SQ. POST OPEN HOLE  
SIZE 1 3/4" X 10' (\*O.H.)  
COLOR

3/8" DIA. DRIVE RIVET POST  
ASSEMBLY TO BASE ASSEMBLY


5/16" 90° CORNER BOLT WITH  
LOCKWASHER AND NUT (POST  
ASSEMBLY TO ANCHOR)

GROUND LINE

ANCHOR ASSEMBLY:  
TYPE SQ. ANCHOR O.H.  
SIZE 2"X3'  
BREAKAWAY SYSTEM SMALL

NOTE:

1. \*O.H.= OPEN HOLE
2. REFER TO M.U.T.C.D. FOR LETTER  
SIZE AND SIGNAGE STANDARDS

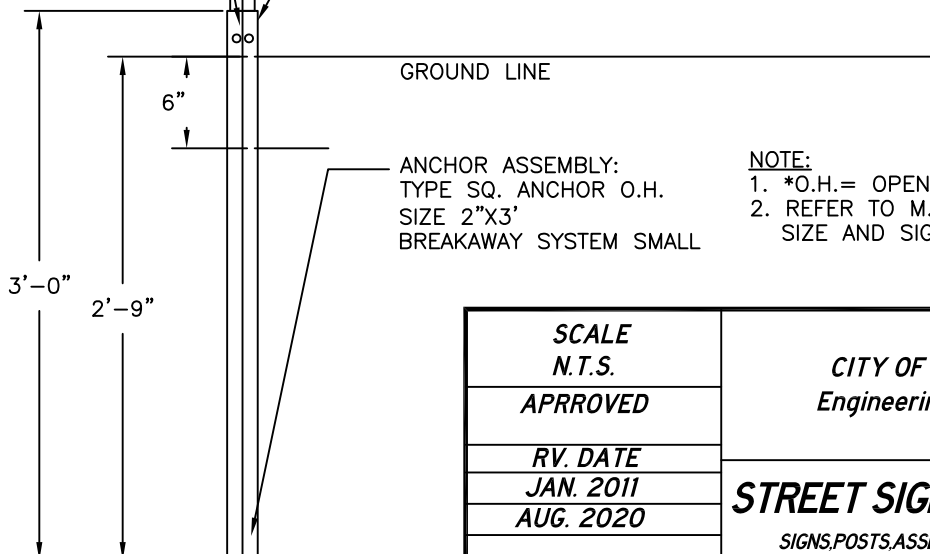

## SECTION 8.6

SCALE N.T.S.	CITY OF TORRINGTON Engineering Department
APPROVED	
RV. DATE JAN. 2011 AUG. 2020	<b>STREET SIGN STANDARDS</b> SIGNS, POSTS, ASSEMBLIES & FASTENERS